

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
4 August 2005 (04.08.2005)


PCT

(10) International Publication Number
WO 2005/070342 A1

- (51) International Patent Classification⁷: **A61F 2/24**
- (21) International Application Number: **PCT/AU2005/000067**
- (22) International Filing Date: 21 January 2005 (21.01.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2004900302 22 January 2004 (22.01.2004) AU
- (71) Applicant (*for all designated States except US*): **AUSTRIALIAN SURGICAL DESIGN AND MANUFACTURE PTY LIMITED [AU/AU]**; Unit 2, 12 Frederick Street, St Leonards, NSW 2065 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **ROGER, Gregory**
- [AU/AU]; Unit 2, 12 Frederick Street, St Leonards, NSW 2065 (AU).
- (74) Agent: **F B RICE & CO**; 605 Darling Street, Balmain, NSW 2041 (AU).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: HEART VALVE

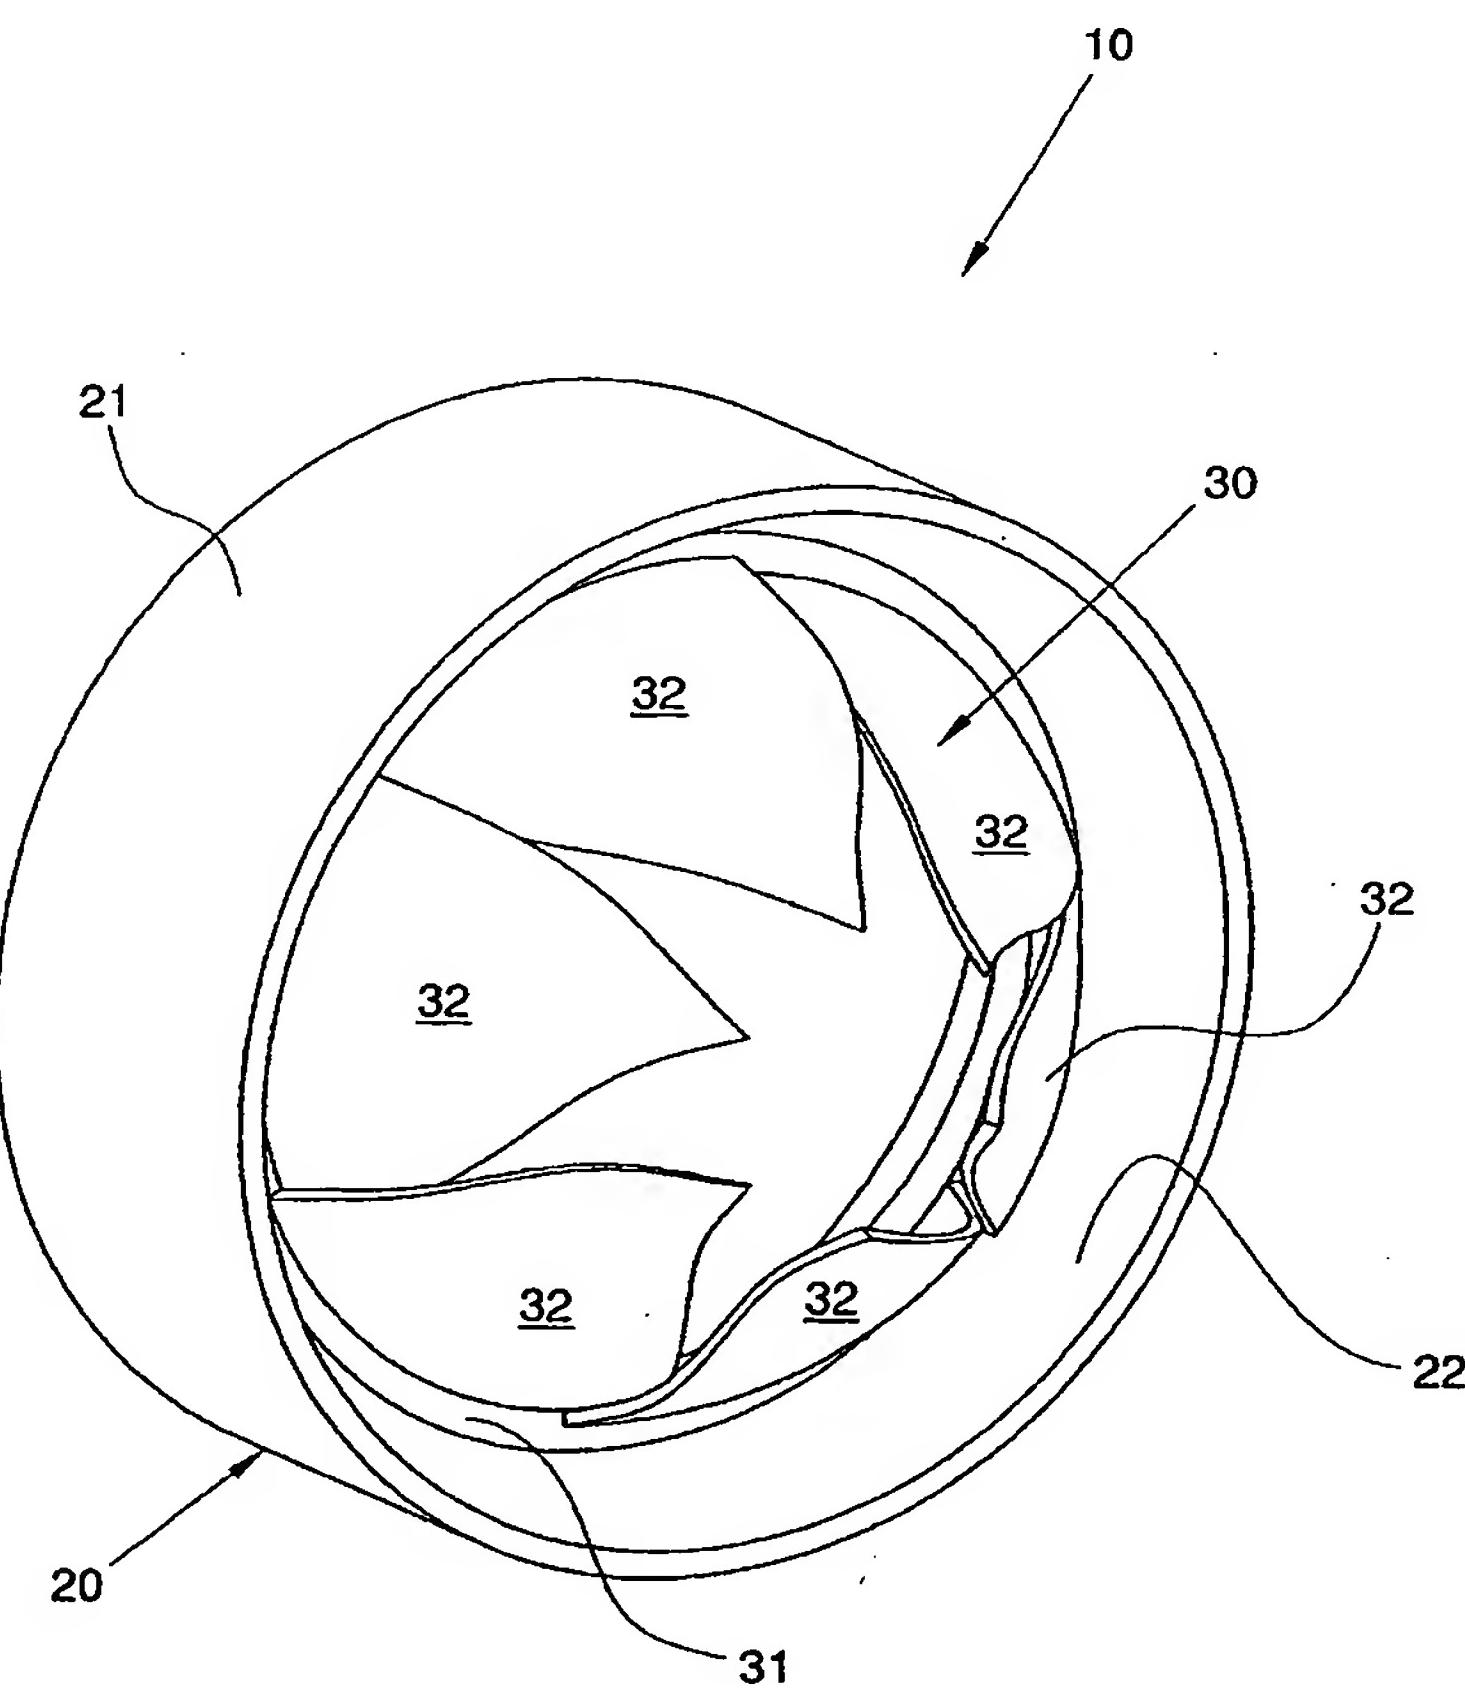

(57) Abstract: A valve assembly (10) has a support ring (20) and a valve body (30). The valve body (30) is supported by the ring (20) and comprises an annular body portion (31) that is rotatably engageable with the support ring (20). The annular body portion (30) supports a plurality of leaflets (32) that are moveable relative to each other and the annular body portion (30) between: a closed position and an open position upon changes in pressure differential across the valve assembly (10).

WO 2005/070342 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*